



→ Classic 40-F-120-F Fixed glass fixing profile

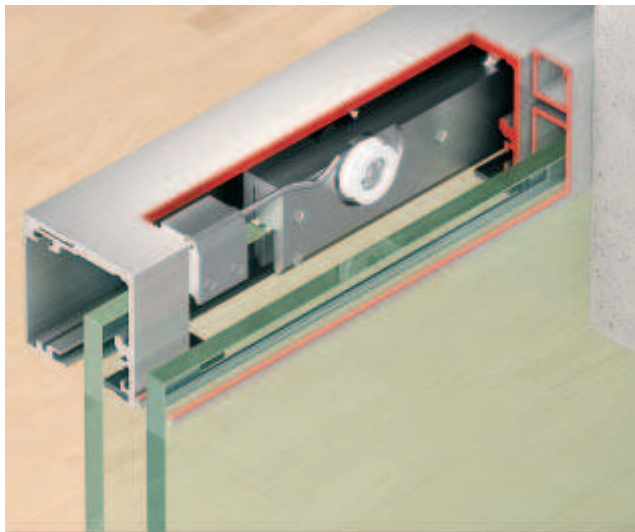

Ceiling installation and wall mounting

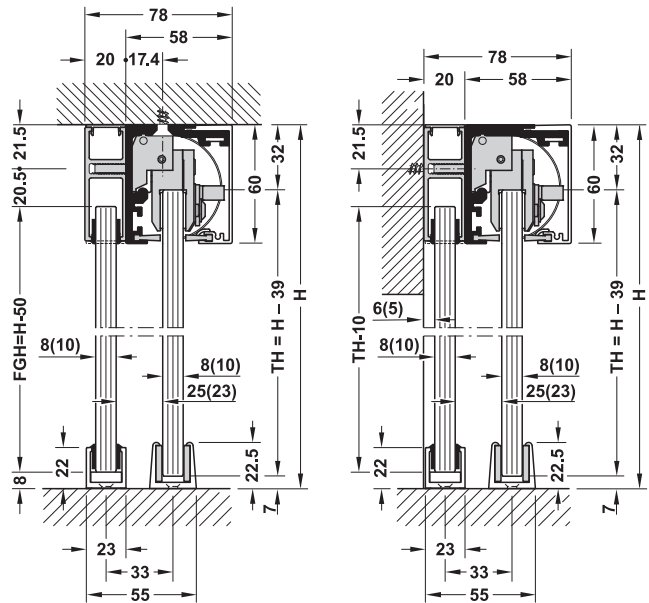

- Installation: Wall mounting and ceiling installation
- For glass thickness: Fixed glass: Tempered safety glass 8 to 10 mm, laminated glass 8–8.7 mm

H = total height
TH = door height
FGH = fixed glass height

Note

The sealing profile is used on both sides for glass thickness 8 and 10 mm.

		Material	Finish/colour	Length mm	Cat. No.
Fixed element fixing profile, for running track set, with screws, for wall mounting and ceiling installation		Aluminium	Silver coloured anodized	2000	940.67.120
			3000	940.67.130	
		Stainless steel coloured anodized	2000	940.67.121	
			3000	940.67.131	
Fixed glass fixing profile, for floor and wall connection, height adjustable, pre-drilled and countersunk		Aluminium	Silver coloured anodized	2000	940.67.220
			3000	940.67.230	
		Stainless steel coloured anodized	2000	940.67.221	
			3000	940.67.231	
Sealing profile for glass thickness 8–10 mm		Rubber	Black	5000	940.67.074
				10000	940.67.075
Cover profile, for unused aperture in fixed component		Aluminium	Silver coloured anodized	2000	940.67.320
				3000	940.67.330
			Stainless steel coloured anodized	2000	940.67.321
				3000	940.67.331
Cover profile, for unused aperture for running distance, with retaining spring		Aluminium	Silver coloured anodized	1000	940.67.410
				2000	940.67.420
			Stainless steel coloured anodized	1000	940.67.411
				2000	940.67.421
End cap, for fixed glass fixing profile (for floor connection), 1 piece		Plastic	Silver coloured	–	940.67.064
			Stainless steel coloured	–	940.67.065
End caps, 1 pair, for compensating 10, 15 and 20 mm distance, for clip fixing		Plastic	Silver coloured	–	940.67.062
			Stainless steel coloured	–	940.67.063

Order reference

The wall mounted running track sets are always used for wall mounting and ceiling installation. The holes required for wall mounting or ceiling installation must also be drilled on site.