


Integrated ceiling installation



- Installation: Ceiling installation
- For glass thickness: Glass doors: Tempered safety glass 8 or 10 mm, fixed glass: Tempered safety glass 8 or 10 mm, laminated glass 8–8.7 mm
- Height adjustment facility: +4/-3 mm

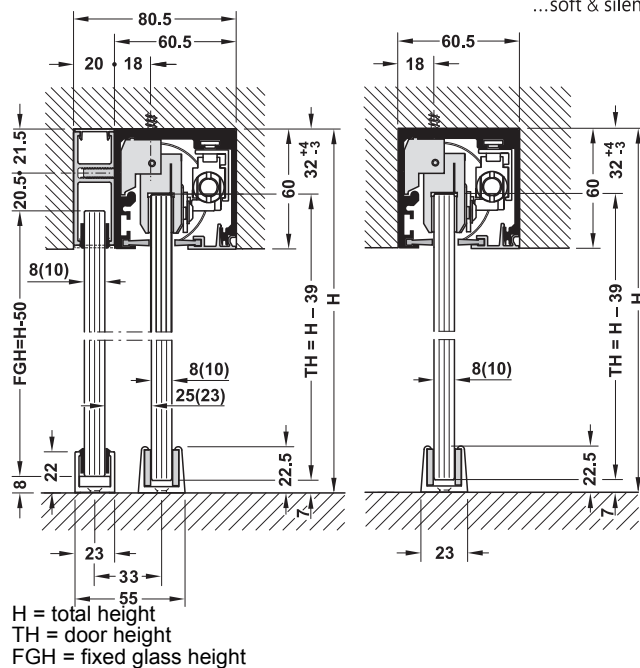

smuso
...soft & silent

→ Set

	Door weight kg	Stainless steel coloured anodized	Silver coloured anodized
Consists of running gear, stopper and floor guide	up to 120	941.30.008	941.30.009

Order reference

Please order appropriate soft and self closing mechanism set for the above set (see cross reference) separately.

→ Tracks and accessories

Note

The sealing profile is used on both sides for glass thickness 8 and 10 mm.

		Material	Finish/colour	Length mm	Cat. No.
Running track set, consists of running track and panel		Aluminium	Silver coloured anodized	2000	941.30.920
			3000	941.30.930	
		Stainless steel coloured anodized	2000	941.30.921	
			3000	941.30.931	
Fixed element fixing profile, for running track set, with screws, for integrated ceiling installation		Aluminium	Silver coloured anodized	2000	940.67.120
			3000	940.67.130	
		Stainless steel coloured anodized	2000	940.67.121	
			3000	940.67.131	
Fixed glass fixing profile, for floor and wall connection, height adjustable, pre-drilled and countersunk		Aluminium	Silver coloured anodized	2000	940.67.220
			3000	940.67.230	
		Stainless steel coloured anodized	2000	940.67.221	
			3000	940.67.231	
Sealing profile for glass thickness 8–10 mm		Rubber	Black	5000	940.67.074
				10000	940.67.075
Cover profile, for unused aperture in fixed component		Aluminium	Silver coloured anodized	2000	940.67.320
			3000	940.67.330	
		Stainless steel coloured anodized	2000	940.67.321	
			3000	940.67.331	
Cover profile, for unused aperture for running distance, with retaining spring		Aluminium	Silver coloured anodized	1000	940.67.410
			2000	940.67.420	
		Stainless steel coloured anodized	1000	940.67.411	
			2000	940.67.421	
End cap, for fixed glass fixing profile (for floor connection), 1 piece		Plastic	Silver coloured	–	940.67.064
			Stainless steel coloured	–	940.67.065
Extension set for connecting the running tracks	–	–	–	–	941.30.090

Soft and self closing mechanism set

► AH 7.97 D

DGH-B-INT 2010; HDE-en, 06/10; Dimensional data not binding. We reserve the right to alter specifications without notice.